





### AWS812 AIR HOSE REEL

- Features molded steel and electrostatically painted covers, reinforced polyurethane hose and 4 way roller guide assembly
- Includes 12m of 8mm ID delivery hose and short lead in hose
- Heavy duty external steel swivel provides years of trouble free operation
- Manufactured in Italy
- Ideal for industrial/production line applications



### S SERIES AIR HOSE REELS

- Impact resistant UV stabilised covers for maximum durability
- Automatic and positive latching mechanism
- Can be mounted on the floor, wall or ceiling
- Adjustable spring tension
- High flow swivel and fluid path facilitates maximum air flow
- Crimped hose ends reduce OH&S concerns and possible air leaks
- Detachable steel mounting bracket included standard enables 180° hose reel rotation

Part No.	Product Description
SA300	18m x 10mm ID hose & 0.9m lead in hose
SA400	15m x 12mm ID hose & 0.9m lead in hose



Automotive workshops, service stations, farmers, joinery shops, production plants, the home handyman all use them... price competitive air and water reels. **The Alemlube S Series**

#### SA300 and SA400 Air Hose Reels

feature automatic and positive latching

mechanisms that lock the hose at

the desired length and can be used

with tyre gauges, die grinders, impact

wrenches, air drills, reciprocating saws

or air ratchets. **The S Series SW500**

water reel supplied with two way roller

guides and a 1.2 metre lead in hose

can be used to fill up radiators clean off

forecourts or just to water the backyard.



### ECONOMY COMPACT AIR HOSE REELS

- These compact plastic covered hose reels are ideal for smaller type workshops
- Lightweight & portable with built-in carry handle
- Complete with wall/ceiling mounting bracket and 1 metre of lead in hose
- Maximum operating pressure of 300psi
- Maximum working temperature of 60°C

Part No.	Product Description
AP609	6mm ID x 9 metre air hose reel
AP1009	10mm ID x 9 metre air hose reel



### 504100 SPRING REWIND AIR AND WATER HOSE REEL

The 504100 features the latest in innovative hose reel design including:

- Forged brass shaft assures corrosion free and leak proof operation
- A specially treated spring provides long life and trouble free operation
- Multi stage mounting arms allow for the reels to be floor, ceiling, wall or truck mounted
- Modular spring cassette for ease of servicing
- Maximum working pressure of 300psi
- 1/2" BSP (f) inlet and outlet threads
- Supplied complete and ready to use inclusive of 15 metres of 12mm ID delivery hose and a 0.8 metre lead in hose



**SW500**  
WATER HOSE REEL

- Impact resistant UV stabilised covers for maximum durability
- Automatic and positive latching mechanism
- Can be mounted on the floor, wall or ceiling
- Adjustable spring tension
- High flow swivel and fluid path facilitates maximum delivery
- Includes detachable steel mounting bracket, 18 metres of 12mm ID hose, a 1.2 metre lead in hose and a water nozzle



**WP1290**  
LARGE CAPACITY WATER HOSE REEL

- Stores and retrieves up to 30 metres of 12mm ID hose
- 3/4" BSP (m) inlet and outlet threads
- Durable impact and weather resistant covers ensure a long working life
- Positive latching system locks the hose at the desired length
- Convenient carry handle facilitates easy movement of the hose reel as required
- Integral swivel bracket assists in reel mounting and demounting



**506101**  
SINGLE ARM WATER HOSE REEL

- Lightweight one piece molded composite barrel assembly
- 10mm ID x 10m capacity
- Extra large 4 x 10mm long plastic ratchet mechanism and latch pawl
- Full ported shaft and swivel facilitates maximum product delivery
- 0.8m long inlet hose included as standard
- Hose reel guide with 6 rollers
- Convenient access to the swivel for ease of assembly maintenance
- Covered by a unique two year warranty



**504400**  
HIGH PRESSURE WASH DOWN WATER HOSE REEL

504400 features the latest in innovative hose reel design including:

- Forged brass shaft assures corrosion free and leak proof operation
- A specially treated spring provides long life and trouble free operation
- Multi stage mounting arms allow for the reels to be floor, ceiling, wall or truck mounted
- Modular spring cassette for ease of servicing
- Maximum working pressure of 3,670psi
- 1/2" BSP (f) inlet and outlet threads
- Supplied complete and ready to use inclusive of 15 metres of 9mm ID delivery hose and a 0.8 metre lead in hose



**8081-D**  
ALEMITE HEAVY DUTY AIR AND WATER HOSE REEL


- Dual pedestal design provides additional strength and stability in harsh off-road conditions
- Narrow width (21.6cm) enables space saving hose reel layouts
- Maximum working pressure of 1,800psi
- Supplied inclusive of 15 metres of 12mm ID delivery hose
- Factory lubricated and sealed one piece spring assembly is covered by a lifetime guarantee
- Heavy duty metal arbor withstands extreme stress and eliminates arbor failures
- Easy to change five position guide arm assembly facilitates floor, wall and ceiling mounting
- Ratchet pawl cartridge minimizes service headaches and downtime
- Two slot mounting holes aid in hose reel installation



**8080-F**  
ALEMITE HEAVY DUTY AIR AND WATER HOSE REEL

The 8080-F reel from Alemite USA is setting a new standard for reliability and durability in the 19mm 25 metre capacity reel market. Corrosion resistant, easy to install and incredibly durable, Alemite USA's newest series of reels makes the difference in high volume applications.

- Sealed spring cassette
- Sealed and plated bearings
- Narrow width
- Easy and quick mounting
- Lifetime warranty on the hose guide assembly and latch pawl spring

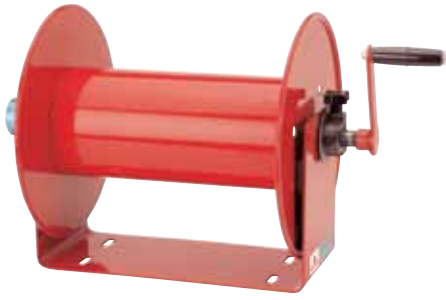

**117-5-100**  
**3/4" HAND REWIND**  
**HOSE REEL**

- The 117-5-100 hose reel is a high performance, compact hand crank hose reel
- Standard working pressures up to 4,000psi
- Reel handles fluid temperatures from -29°C up to +99°C
- Adjustable drag brake eliminates hose backlash while the hose is unreeling
- Stores and retrieves up to 30 metres of 19mm ID hose
- Other models for larger and longer hoses available
- Hose not included



**1185-2024-A**  
**1-1/2" AIR REWIND HOSE REEL**

- All metal construction
- Engineered and designed for use in challenging, heavy duty applications
- Can store and retrieve up to 30 metres of 38mmID hose
- Pressures up to 600psi
- Adjustable drag brake eliminates hose drag while unreeling the hose
- Hand, hydraulic and electric rewind models also available
- Operating temperatures of between -29°C and +99°C
- 1-1/2" NPT (f) inlet and outlet



**1185-1124-H**  
**1-1/2" LARGE CAPACITY**  
**HYDRAULIC REWIND HOSE REEL**

- Designed to handle long lengths of large diameter hose for increased volume delivery
- Working pressures of up to 600psi
- Low profile outlet rises and open hose slot ensure hose wraps
- Capable of handling oxygen and steam with compatible EPDM O-rings, natural gas with Buna/Nitrile O-rings and many other applications
- Can store and retrieve up to 15 metres of 38mm ID hose
- 1 1/2" BSP (f) inlet and outlet ports
- Ideal for use in the mining and contractor sectors



**1195-2032**  
**2" LARGE CAPACITY HAND**  
**REWINDHOSE REEL**

- Working pressures up to 600psi
- 2" NPT inlet and outlet
- All metal construction
- Can store and retrieve up to 35m of 48mm ID hose
- Also suitable for oil, fuel and waste oil transfer
- Full flow brass swivel facilitates high volume fluid transfer
- Pneumatic, hydraulic AC or DC rewind models also available



**The 1175-8-100A air rewind hose reel**

can store and retrieve up to 25 metres of 32mm ID hose. Engineered and designed in the USA for use in challenging and heavy duty applications, the air motor, gear, sprocket and chain rewind system provides years of trouble free operation. The heavy duty 1 1/4" NPT (f) inlet swivel and 1 1/4" porting through the reel maximises fluid flow and makes the reel suitable for applications involving maximum pressures of up to 600psi. Suitable for use in mine site workshops, in road contracting applications and on service vehicles, installing a 1175-8-100A air rewind hose reel will save you and your company time, effort and money.



**OS615**  
OXY ACETYLENE HOSE REEL

- Heavy duty steel construction with corrosion resistant powder coat finish
- Double o’ring design prevents leaks
- Maximum working pressure of 300psi
- Supplied inclusive of 15 metres of 6mm ID hose and 1.5 metre lead in hose
- Suitable for use on utes, tray top and flat bed trucks
- Ideal for contractors, fabricators and people involved in the construction industry



**SO600**  
OXY ACETYLENE HOSE REEL

- Impact resistant UV stabilised covers
- Automatic and positive latching system
- Maximum working pressure of 300psi
- Adjustable spring tension
- Can be mounted on the wall, ceiling, tray top & flat bed trucks, or in utes
- Supplied complete with 15m of 6mm ID rubber hose



**The new SO600 oxy acetylene hose**

**reel** is a genuine industrial quality welding reel ideal for all general welding applications undertaken by contractors and fabricators in the industrial, automotive and construction fields. Featuring impact resistant UV stabilised covers for durability and an automatic and positive latching system, the SO600 is easily mounted on the wall or ceiling and can be conveniently carried in utes and service vehicles.

The heavy duty adjustable spring assembly retrieves the 15m of 6mm ID rubber hose even when fully extended and the reel has a maximum working pressure of 300psi.



**ALEMLUBE**  
FILTER, REGULATOR,  
LUBRICATORS

Air Service Units supply clean compressed air to your valuable air tools, air motors and pneumatic equipment by protecting against particle contamination and moisture. Featuring unique recessed pressure gauges, these compact units are ideal for installation where space is restricted.

Part No.	Product Description
6604	1/4" Combination filter, regulator & lubricator
6606	3/8" Combination filter, regulator & lubricator
6608	1/2" Combination filter, regulator & lubricator



**51114**  
DIGITAL TYRE GAUGE

- Accurate to ±1%
- Tough impact resistant alloy construction
- Easy to read backlit digital display
- Measures from 5psi to 150psi
- Oil resistant rubber casing protects the gauge
- Can be used for inflation and deflation
- Working temperature range from 0°C to +40°C
- Inlet thread of 1/4" BSP (f)
- Digital display powered by two CR2032 batteries
- Battery life of 140 working hours
- Can be switched on and off
- Supplied standard with a dual chuck
- Digital operation
- Measures in units of psi, bar, kpa and kg/cm<sup>2</sup> as required



**61104**  
3/8" BUTTERFLY IMPACT  
WRENCH

- 3/8" square drive
- Single hammer clutch
- Brass air inlet swivel 360
- Operating air pressure of 90psi
- Maximum torque (reverse): 90 ft-lb (122 Nm)
- Free speed: 10,000 rpm
- Average air consumption: 3 cfm
- Overall length: 140mm
- Air inlet: 1/4"NPT
- Air hose ID: 3/8" (10mm)
- Anvil size: 3/8" (10mm)
- Weight: 1.0kg



**61114N**  
1/2" TWIN HAMMER  
IMPACT WRENCH

- Twin hammer mechanism
- Operating air pressure of 90psi
- Maximum torque: 400 ft-lb (542 Nm)
- Free speed: 7,000 rpm
- Average air consumption: 4 cfm
- Overall length: 153mm
- Air hose ID: 3/8" (10mm)
- Low noise level of 83 dB(A)
- Weight: 1.9kg



**61124**  
1/4" 90° ANGLE DIE GRINDER

- Comfort cushioned grip
- Easy to set rpm
- Rotating air inlet
- Free speed: 20,000 rpm
- Average air consumption: 4 cfm
- Air inlet: 1/4"
- Overall length: 170mm
- Air hose ID: 3/8" (10mm)
- Low noise level of 77 dB(A)
- Weight: 0.6kg



**61134**  
1/4" STRAIGHT DIE GRINDER

- Comfort cushioned grip
- Easy to set rpm
- Rotating air inlet
- Free speed: 25,000 rpm
- Average air consumption: 4 cfm
- Air inlet: 1/4"
- Overall length: 156mm
- Air hose ID: 3/8" (10mm)
- Low noise level of 77 dB(A)
- Weight: 0.6kg



**61144**  
3/8" RATCHET WRENCH

- Needle bearing in front head
- Robust construction and hardened ratchet housing
- Soft grip for ease of use
- Operating air pressure of 90psi
- Maximum torque: 50 ft-lb (68 Nm)
- Free speed: 150 rpm
- Average air consumption: 4 cfm
- Overall length: 254mm
- Air hose ID: 3/8" (10mm)
- Low noise level of 79 dB(A)
- Weight: 1.2kg



**61154**  
1/2" REVERSIBLE DRILL WITH  
INDUSTRIAL KEYLESS CHUCK

- Planetary gear system with needle bearing
- Composite motor housing
- Two speed trigger (slow speed when pulled half way)
- Reverse bar on both sides
- Operating air pressure of 90psi
- Free speed: 800 rpm
- Average air consumption: 4 cfm
- Overall length: 218mm
- Supplied with a side handle
- Low noise level of 83 dB(A)
- Weight: 2.9kg



**61164**  
1/4" PISTOL SCREWDRIVER

- Composite motor housing
- Planetary gear system with needle bearing
- Two speed trigger (slow speed when pulled half way)
- Reverse bar on both sides
- Patented clutch design - Forward: adjustable torque Reverse: full torque
- Operating air pressure of 90psi
- Free speed: 1,800 rpm
- Average air consumption: 4 cfm
- Overall length: 196mm
- Hex drive capacity: 1/4"
- Low noise level of 83 dB(A)
- Weight: 2.9kg



**61174**  
4" DISC ANGLE GRINDER

- Built-in comfort grip
- Aluminium handle
- Handles 4" (100mm) or 4-1/2" (115) discs
- Accepts disc thicknesses from 0.8mm to 6mm
- Complete with governor and spindle lock
- Spindle size: M10 x 1.5 or M14 x 2.0
- Swivel guard adjustable to 9 positions
- Rear exhaust
- Operating air pressure of 90psi
- Free speed: 10,000 rpm
- Average air consumption: 4 cfm
- Overall length: 238mm
- Hex drive capacity: 1/4"
- Low noise level of 83 dB(A)
- Weight: 2.0kg



**Alemlube** distributes a comprehensive range of reliable air tools to kit out your automotive workshop or industrial workplace.

There are many benefits to be gained from using air tools that will save you time and money. Air tools are very powerful tools, they are full of torque and will make any job easier.

Air tools have more power than most electric power tools and they are far more durable due to their rugged design. Very cost efficient and long lasting make air tools from Alemlube the tools to buy.

The range includes:

- 3/8" Butterfly Impact Wrench
- 1/2" Twin Hammer Impact Wrench
- 1/4" 90° Angle Die Grinder
- 1/4" Straight Die Grinder
- 3/8" Ratchet Wrench
- 1/2" Reversible Drill with Industrial Keyless Chuck
- 1/4" Pistol Screwdriver
- 4" Disc angle Grinder

## AIR TOOL & HOSE REEL KITS

### S Series Hose Reel + Air Tool

- **SA3114N** SA300 hose reel + 61114N air tool
- **SA3104** SA300 hose reel + 61104 air tool
- **SA3124** SA300 hose reel + 61124 air tool
- **SA35114** SA300 hose reel + 61144 air tool
- **SA4114N** SA400 hose reel + 61114N air tool
- **SA4144** SA400 hose reel + 61144 air tool
- **SA4154** SA400 hose reel + 61154 air tool
- **SA4164** SA400 hose reel + 61164 air tool



SA3114N

### Samoa 10m x 10mm ID Hose Reel + Air Tool

- **506134** Samoa Hose Reel + 61134 air tool
- **506144** Samoa Hose Reel + 61144 air tool



504174



506144

### Samoa 15m x 12mm ID Hose Reel + Air Tool

- **504154** Samoa Hose Reel + 61154 air tool
- **504174** Samoa Hose Reel + 61174 air tool