



# Alemmlube

Master Catalogue | August 2011



Greasing Equipment   Drum Pumps   Hose Reels   Vehicle Hoists   Wheel Service Equipment   Lubrication Systems





### 47040N COOLANT CHANGER

- Extracts and replaces coolant from a vehicle's radiator, engine block and heater core utilising compressed air
- Pneumatic design for easy fluid changing
- Transparent twin 16 litres capacity cylinders to assist in the monitoring of the extraction and recharging process
- Air operated - no AC or DC power required
- Completely changes radiator coolant in less than 5 minutes
- Supplied with radiator adaptors to suit most vehicles
- Sturdy, compact and maintenance free
- Dimensions of 330mm (D) x 450mm (W) x 1400mm (H)
- Weight of 44kg



### 47010 POWER STEERING FLUID EXCHANGER

The 47010 is designed to clean, flush and replace the power steering fluid used in a vehicle's power steering system. With the aid of a pump, hoses, pressure gauges, a sight tube, a suction tube, a new fluid tank, a waste fluid tank and a flow adjustment switch, the machine quickly and effectively removes the old contaminated power steering fluid from the circuit while simultaneously adding the new required fluid.

- 12volt operation results in quick and easy power steering fluid change over
- New fluid tank of 5 litres capacity
- Waste fluid tank of 16 litre capacity
- Working pressure of 5 bar (70psi) to 8 bar (112psi)
- Generally used in mechanical workshops where power steering systems have had a failure



### 47070A FULLY AUTOMATIC ATF CHANGER

- Automatically replaces up to 99% of a vehicle's transmission fluid
- Sturdy compact design
- A complete ATF exchange done in 15 minutes or less
- No need to tie up a vehicle hoist and a qualified mechanic
- Ideal for taxi workshops and workshops undertaking a lot of work on late model vehicles which don't have dipstick capability



### 47081A AIR CONDITIONING FLUID RECHARGER

- Fully automatic air conditioning fluid recharging machine complete with printer
- 240V operation with acoustic and visual service alarm alerting the operator that maintenance and filter replacement are required
- Suitable for use with R1349 refrigerant
- Vacuum pump capacity of 72LPM
- Data base is quickly and easily upgradable through the RS232 port
- Quick and easy to operate
- Invest in your new profit centre now
- Programmable charging with a preset quantity of refrigerant plus automatic stop
- 18kg refillable refrigerant bottle with automatic heater
- Scale resolution of  $\pm 10$ grams
- Recovery speed of 400grams per minute in liquid phase
- Operating temperature range of between 110°C and 49°C



## WORKSHOP FITOUTS

Alemlube supplies a wide range of vehicle hoists, waste oil handling equipment, on car servicing equipment, fume extraction systems, oil monitoring systems, hose reels, greasing equipment and drum pumps in conjunction with distributors around the country. Of course, prompt, professional and personable after sales service for our products is also available. Working with many of the Europe's leading workshop equipment manufacturers, ongoing product improvements, strong brand recognition, a motivated and capable team and prompt and professional after sales service have been cornerstones of our programme and success to date. In New South Wales, Victoria and Queensland we have another division where dedicated Workshop Fitouts Product Managers, supported by teams of fitters, can assist you with your new workshop. From concept design to operational stage, while considering such issues as productivity, car flow through, budgets, timeframes and other required contractors, our experiences and capable Workshop Fitouts Product Managers will deliver for you a first class workshop facility on time.

## WORKSHOP FITOUTS BRAND NAMES

Samoa, Alemite, Ravaglioli, Aerservice, Permex, Spin, Everlift, Unite and Alemlube.

## Fume Extraction Equipment


Alemlube offers a wide range of fume extraction equipment that can be used in motorbikes, car, van, truck or bus workshops. The advent of higher revving engines and diesel engine vehicles requiring dyno service work, an increased focus by employers on the well being and working conditions of their team and Occupational Health and Safety issues, are factors that have all combined to generate an increased awareness of the need to provide mechanics with a cleaner and healthier working environment.

Workshop Managers can choose a system that best suits their specific application with single extractor stations, centralised installations, fixed, mobile, wall or floor mounted systems available.

### AS SERIES AUTOMOTIVE WORKSHOP FUME EXTRACTORS

- Reduce vehicle emissions by improving air quality in your workshop  
OH&S friendly
- Spring, push button or cordless remote rewind option available
- Various models available for motorbikes, car, buses and trucks
- Fixed, or with the aid of channel rails, mobile operation is possible
- Supply, installation and commissioning readily available

Series Number	Suitable For	Rate of Flow M3/H
ATNV75	Motorbikes	350
ATNV100	Cars and Light Commercials	450
ATNV150	Truck & Bus	1,300

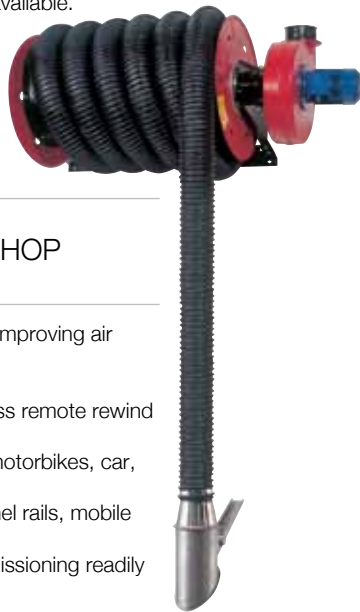

### IBSV 160 SERIES ARTICULATED WELDING FUME EXTRACTION ARMS

- Wall mounted with 180° rotation for ease of use
- Self-supporting suction arm structure
- Pre-coated aluminium construction
- Arm joints made from aluminium alloy combined with a ceramic fibre clutch system with flexible, flame resistant PVC pipe joints and an internal steel suction hood joint
- 160mm diameter aluminium suction pipe
- Sheet metal black coated hood reduces welding arc reflections and is complete with a graduated sector air flow regulator gate, protection mesh and handle



Part No.	Product Description
IBSV 160/2	2 Metre welding fume extraction arm
IBSV 160/3	3 Metre welding fume extraction arm
IBSV 160/4	4 Metre welding fume extraction arm



### AP1 75/5 240V WALL MOUNTED FUME EXTRACTOR

- Wall mounted fume extraction system suitable for cars and industrial vehicles such as forklifts etc
- Cost effective system that is ideal for small workshops, tyre stores and quick lube tune up bays
- 240V plug and play for do it yourself easy installation
- Comes complete with 5 metres of 75mm ID light rubber hose reinforced with squash resistant nylon spiral, rated to a maximum of 130°C and rubber exhaust nozzle
- Also available: AP1 75/5, 415V 3 phase and other large models



### FAC SERIES MOBILE INDUSTRIAL FUME EXTRACTORS

- Fully mobile with a 160mm diameter aluminium articulated arm that can rotate 360°
- Safely removes and filters welding fumes from the industrial workplace
- Fitted with a resettable hour meter and differential thermal overload cut-out
- Operating power of 1.1 kW
- For use at ambient temperatures ranging between -10°C and 60°C

#### Mechanical Filtering:

Comprises a metal prefilter, rigid pocket filter and pleated synthetic filter

#### Electrostatic Filtering:

Comprises a metal prefilter, electrostatic filter and pleated synthetic filter

Part No.	Product Description
FAC/T	Mechanical mobile industrial fume extractor
FAC/E	Electrostatic mobile industrial fume extractor



# Alemlube

**Head Office**

22 Green Street  
Brookvale NSW 2100  
Phone: 02 9938 2999  
Fax: 02 9938 6605

**Queensland/PNG**

Unit 1 / 19 Hinkler Court  
Brendale QLD 4500  
Phone: 07 3889 8480  
Fax: 07 3889 8490

**New South Wales**

15 Green Street  
Brookvale NSW 2100  
Phone: 02 9939 0711  
Fax: 02 9939 0411

**Western Australia**

31 Resource Way  
Malaga WA 6090  
Phone: 08 9209 3066  
Fax: 08 9209 3933

**New Zealand**

Unit 2/43  
William Pickering Drive  
Albany Auckland NZ  
Phone: 09 447 1007  
Fax: 09 447 1008

**Victoria/Tasmania**

31-33 Cyber Loop  
Dandenong VIC 3175  
Phone: 03 8787 8288  
Fax: 03 8787 8266

**South Australia/  
Northern Territory**

Unit 2/91 Harrison Road  
Dudley Park SA 5008  
Phone: 08 8241 7111  
Fax: 08 8241 7011

[www.alemlube.com.au](http://www.alemlube.com.au) [www.alemlube.co.nz](http://www.alemlube.co.nz)  
[info@alemlube.com.au](mailto:info@alemlube.com.au)