



PRODUCT INFORMATION

December 2015



52034

240V Self Service MC AdBlue® Bowser

The 52034 self service MC AdBlue® 240V bowser is designed for non-commercial AdBlue® dispensing and is capable of flow rates of up to 34 L/min with a duty cycle of 20 minutes.

Supplied standard with and automatic nozzle (SB325) with break-away system and stainless steel spout, AdBlue® long life 3D filter and front panel for easy maintenance, the 52034 is equipped with a turbine-type flow meter and an electronic unit to a facilitate multi-user consumption, management system. Local memory of the last 255 events is another standout management feature.

A PC interface for exporting and organising data makes the task of keeping on top of dispensed AdBlue® an easy exercise and the ability to enter vehicle registration numbers, mileage, date and time ensures accuracy at all times.

The 52034 self service MC AdBlue® bowser available from Alemlube is delivered to you complete with a diaphragm pump, flow meter, automatic nozzle, management software, key kit including ten yellow user keys, one red manager key, USB card reader and security pad lock. Dedicated software for printing individual summaries of dispensing details can be made available on request.



PRODUCT SPECIFICATIONS, FEATURES AND BENEFITS

Automatic nozzle with flow rates of up to 34 L/min

240V, 400 watt, Amp max. 1.95

IP55 protection

Accuracy of $\pm 1\%$

80 users capability

Duty cycle of 20 mins. on 20 mins. off

Self-priming performance

Automatic nozzle (SB325) with break-away system, s/s spout

AdBlue® 3D filter

Turbine-type flow meter



Local memory of the last 255 events

PC interface for exporting & organising data

Accepts vehicle registration numbers, mileage, date and time

Supplied complete with management software & magnetic user keys

DIMENSIONS

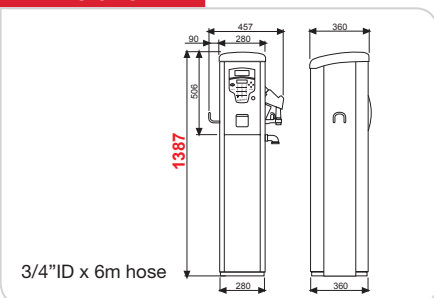

ORDERING INFORMATION

52034 Self Service MC AdBlue® Bowser

